

## FINISHING YOUR WALL QUILT:

1. Sandwich your quilt with your choice of batt. Either hand quilt or machine quilt it in a pleasing fashion of your choice. Bind your wall quilt and you are finished! (See Diagram E)

Finished Size 17"x 13" (Horz) or 13" x 17" (Vert)

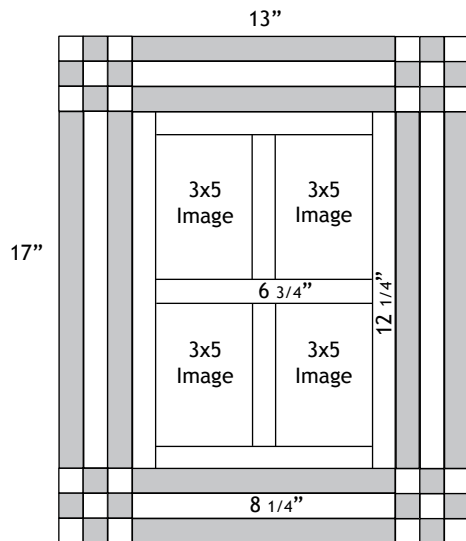


Diagram E

*See our website for a PDF File image of this pattern.*

### CARE INSTRUCTIONS:

Colorfast for hand washing:

Use cold water and mild (neutral PH) detergent; an example of a neutral PH detergent would be Ivory, air dry.

## VINTAGE IMAGE CATEGORIES ON WEB SITE:

- National Parks - 50 Different Parks
- Vintage Sewing and Quilting Collection
- Antique Home and Garden Collection
- Household - Cooking and Kitchens
- Gardening - Vegetables and Flowers
- Canning Labels - Fruits and Vegetables
- Antique Flower Alphabet by Catherine Klein
- Cowgirls and Cowboys / Horses / Cows
- Santas / Christmas / Angels / Halloween
- Thanksgiving / Easter / Patriotic / Valentines
- Fairies - Cicely Barker, Outhwaite, Cloke
- Children - Jessie Willcox Smith and others
- State and Local Views / Railroads
- Agriculture / Farms / Chickens / Rabbits / Cats
- Sports - Fishing, Skiing, Golf, Football
- Civil War Sesquicentennial / Revolutionary War
- Girl and Boy Scouts, Campfire Girls Centennial
- Camping / Canoeing / Hiking / Birds

## OLDE AMERICA ANTIQUES

To view more vintage images go to our web site:

**www.OldeAmericaAntiques.com**

**Email:** susandavis@oldeamericaantiques.com

Bozeman, MT 59715 • 406-587-0937

© 2015 Olde America Antiques - All Rights Reserved

# OLDE AMERICA ANTIQUES

## Nine-Patch Quilt Pattern Quilted Wall Hanging Using 3"x 5" Quilt Blocks

Finished Size 17"x 13" (Horz) or 13" x 17" (Vert)



### GENERAL INFORMATION:

Creator assumes the user has basic sewing and quilting knowledge.

Adjust subcut strip lengths as needed for personal measurements.

All seams are 1/4 inch.

### FABRIC REQUIREMENTS:

1/6 Yard Light Fabric

1/3 Yard Dark Fabric (includes binding)

1/2 Yard Backing Fabric

### ADDITIONAL SUPPLIES NEEDED:

Sewing Machine in good working order and new needle  
Rotary cutting tools, mat, ruler, cutter

Scissors

Straight Pins

Sewing Machine Thread


## CUTTING DIRECTIONS:

**LIGHT FABRIC:** Cut 4 strips (selvage to selvage) 1 1/4" x 44"  
 Subcut - 1 strip: 3 - 11" pieces - 9-patch corners  
 1 strip: 2 - 5 1/2" & 3 - 7 1/4" pieces - sashing  
 1 strip: 2 - 12 3/4" & 1 - 8 3/4" pieces - borders  
 1 strip: 2 - 12 3/4" & 1 - 8 3/4" pieces - sashing and borders

**DARK FABRIC:** Cut 4 strips (selvage to selvage) 1 1/4" x 44"  
 Subcut - 1 strip: 3 - 11" pieces - 9-patch corners  
 1 strip: 2 - 12 3/4" & 1 - 8 3/4" pieces - borders  
 1 strip: 2 - 12 3/4" & 1 - 8 3/4" pieces - borders  
 1 strip: 2 - 9" pieces - borders

Cut 2 strips for 65" continuous binding  
 (strip width is personal preference)


**ASSEMBLY:** (See Diagram A)

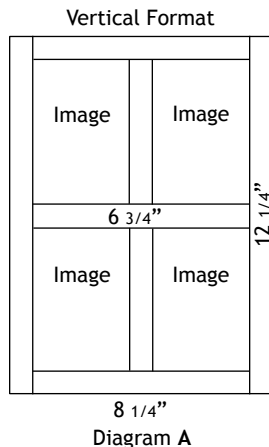

- Carefully peel away the backing from your printed images. Trim the white border to 1/4" from the edge of the image on all 4 sides, this is your seam allowance.
- Start with 2 images and add a 5 1/2" sashing strip between them. Repeat this with the other 2 images. Press with iron.
- Take your 2 image pieces and add a 7 1/4" sashing piece between them, then add another 7 1/4" sashing piece on top and bottom of this unit. Next add a 12 3/4" sashing piece to the sides of the body of your wall quilt. Be sure to press with iron as you go.

## PIECED 9-PATCH CORNERS FOR THE BORDER:

- With your 11" strips of light and dark, sew one unit with dark-light-dark and another with light-dark-light as shown in diagram. Press all seams to the dark fabric. (See Diagram B)

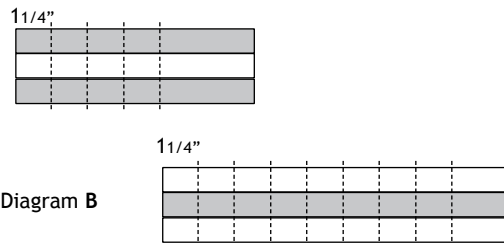

- From the dark-light-dark unit, cut 4 - 1 1/4" pieces across the strips as shown in diagram. Do the same with the second unit (light-dark-light) except cut 8 pieces.

- Sew your corner units (9 patches) as shown in Diagram C, make 4 like this and press with iron.



Diagram C

## ASSEMBLING THE BORDERS:

(See Diagram D)

- Take your 4 dark 12 3/4" pieces and 2 light 12 3/4" pieces and sew them together in 2 units, dark-light-dark, these are your side borders. Do the same with your 8 3/4" pieces. Make 2 units dark-light-dark for the top and bottom borders. Press to the dark fabric.
- Sew the 2 - 12 3/4" units to the sides of the body of your wall quilt. Press with iron.
- Sew one 9 patch corner block to each end of your 8 3/4" border units. These are your top and bottom borders, sew them to your wall quilt matching up the strips with the 9 patches. Press with iron. (See Diagram D)




Diagram D